

## UR5041 Polyurethane Resin

UR5041 is a two-part, ultra high performance resin system which features excellent resistance to sea water and low water absorption.

- Excellent resistance to sea water; ideal for marine environments
- Good low temperature performance; suitable for use down to -60°C
- High toughness and tear resistance; offers good physical protection
- Excellent oxidation resistance; high performance in a range of challenging environments

<b>Approvals</b>	<b>RoHS Compliant (2015/863/EU):</b>	<b>Yes</b>
	<b>UL Approval:</b>	<b>No</b>

### Typical Properties


Liquid Properties:	Base Material	Polyurethane
	Density Part A - Resin (g/ml)	1.17
	Density Part B - Hardener (g/ml)	1.24
	Part A Viscosity (mPa s @ 23°C)	9300
	Part B Viscosity (mPa s @ 23°C)	55
	Mixed System Viscosity (mPa s @ 23°C)	2500
	Mix Ratio (Weight)	3.64:1
	Mix Ratio (Volume)	3.85:1
	Usable Life (20°C)	20 mins
	Gel Time (23°C)	60 mins
	Cure Time (23 °C)	24 hours
	Cure Time (60 °C)	4 hours
	Colour Part A - Resin	Black
	Colour Part B - Hardener	Amber
	Storage Conditions	Dry Conditions: Above 15°C, Below 35°C
	Shelf Life	12 Months
	Exotherm	< 50°C
	<small>(Measured on 100ml sample in a cylinder of diameter 49.4mm @ 23°C)</small>	
	Shrinkage	< 0.5%

Cured System:	Thermal Conductivity (W/m.K)	0.35
	Cured Density (g/ml)	1.18
	Temperature Range (°C)	-60 to +125
	Max Temperature Range (Short Term (°C)/30 mins) (Application and Geometry Dependent)	+130
	Dielectric Strength (kV/mm)	20
	Volume Resistivity (ohm-cm)	10 <sup>15</sup>
	Shore Hardness	A85
	Colour (Mixed System)	Black
	Flame Retardency	No
	Loss Tangent @ 50 Hz	0.015
	Permittivity @ 50 Hz	3.10
	Comparative Tracking Index	Not Measured
	Water Absorption (9.7mm thick disk, 51mm diameter) 10 days @ 20°C / 1 hour @ 100°C	< 0.5% / < 1%
	Elongation At Break	200%

## **Mixing Procedures**

### **Resin Packs**

When in Resin pack form, the resin and hardener are mixed by removing the clip and moving the contents around inside the pack until thoroughly mixed. To remove the clip, remove both end caps, grip each end of the pack and pull apart gently. By using the removed clip, take special care to push unmixed material from the corners of the pack. Mixing normally takes from two to four minutes depending on the skill of the operator and the size of the pack. Both the resin and hardener are evacuated prior to packing so the system is ready for use immediately after mixing. The corner may be cut from the pack so that it may be used as a simple dispenser.

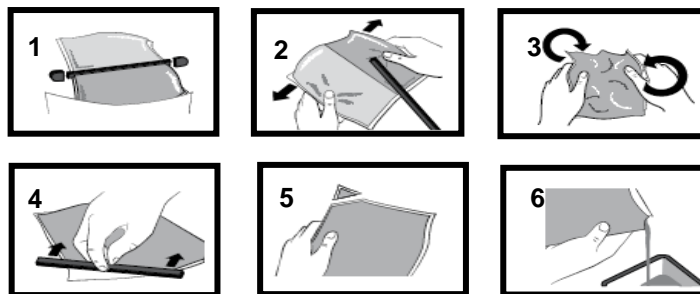

### **Bulk Mixing**

When mixing, care must be taken to avoid the introduction of excessive amounts of air. Automatic mixing equipment is available which will not only mix both the resin and hardener accurately in the correct ratio but do this without introducing air. Containers of Part A (Resin) and Part B (Hardener) should be kept sealed at all times when not in use to prevent the ingress of moisture. Bulk material must be thoroughly mixed before use. Incomplete mixing will result in erratic or partial curing.

### **Additional Information**

- Cleaning:** It is far easier for machines & containers to be cleaned before the resin has been allowed to cure. Electrolube's RRS is suitable for cleaning machines and containers and cured resin may be slowly softened and removed by soaking in our RRS.
- Curing:** Do not heat cure large volumes immediately. Allow these to gel at room temperature and post-cure at high temperature if required (refer to liquid properties for details). Small volumes (250ml) may be heat cured immediately.
- Storage:** When storing under very cold conditions, the hardener may crystallise. If this occurs, simply warm (40°C) the container gently until all crystals have re-melted.
- Health & Safety:** Always refer to the Health & Safety data sheet before use. These can be downloaded from [www.electrolube.com](http://www.electrolube.com)

Revision 3: Jan 2019