


Dissipative Work Surface

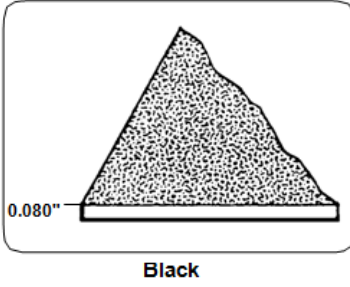

Black

Disclaimer:
All statements, technical data, and recommendations contained herein are based upon tests we believe to be reliable. However, the accuracy or completeness thereof is not guaranteed. The proper and correct applications of products and data is the responsibility of the user. Statements or recommendations not contained herein shall have no force or effect unless embodied in a written agreement signed by authorized officers of Desco Industries, Inc.

Limited Lifetime Warranty:
Desco warrants for one year that Statfree® matting products will be free of defects in materials and workmanship and will guarantee dissipative/conductive mat properties for the life of the mat. Damage to matting caused by misuse of any kind, including using inappropriate cleaners is not covered by Desco Limited Warranty.

RoHS 2, REACH, and Conflict Mineral Statement
None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2016/06/20, or Conflict Minerals are intentionally added in manufacturing this product. Ref. European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See Desco Limited Warranty at Desco.com.

Tolerances:
Width ± 0.250"
Length ± 0.250" every 1 linear foot of running material.

Electrical Properties:

Property	Test Method	Value
Rtq Resistance:	ANSI/ESD STM7.1 & ESD TR53	< 1 x 10 ⁶ ohms
Rtt Resistance:	ANSI/ESD STM7.1 & ESD TR53	< 1 x 10 ⁶ ohms

Physical Properties:

Thickness: 0.080"
 Color*: Black
 Texture*: Pebble Embossed one side
 Tensile Strength (lb/in²): 450 minimum
 Tear Strength (lb/in): 75 minimum
 Coefficient of Friction: 0.36
 Durometer Hardness: Shore "A" 80 ±5
 Chemical Resistance: Resistance to degradation by inorganic acids, organic acids, reducing agents, aliphatic hydrocarbons, mineral oil, aldehydes, and amines
 Continuous Operating: -20 °F to +200 °F
 Flammability: Passes FMV302



*Color and texture may vary between lots and mills

Grounding: This material must be properly grounded for optimum electrical performance. Ask for Technical Bulletin TB-2000 for mat grounding instructions. Part numbers 15007 & 15008 include 14234 Grounding Kit

Cleaning: For optimum performance, periodic cleaning is required following manufacturer's recommendations. Rezstore™ Surface & Mat Cleaner or equivalent is recommended to clean and maintain your mat. See Tech Bulletin TB-3057 for Statguard® Floor Mat Cleaner Application Instructions. See TB-2000 for guidelines regarding the maintenance and cleaning of ESD Mats.

Floor Mat Kit Item Numbers	Roll Material Item Numbers												
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Item</th> <th>Size</th> </tr> </thead> <tbody> <tr> <td>15013</td> <td>36" x 48"</td> </tr> <tr> <td>15014</td> <td>48" x 72"</td> </tr> </tbody> </table>	Item	Size	15013	36" x 48"	15014	48" x 72"	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Item</th> <th>Size</th> </tr> </thead> <tbody> <tr> <td>15011</td> <td>48" x 40'</td> </tr> <tr> <td>15012</td> <td>48" x 60'</td> </tr> </tbody> </table>	Item	Size	15011	48" x 40'	15012	48" x 60'
Item	Size												
15013	36" x 48"												
15014	48" x 72"												
Item	Size												
15011	48" x 40'												
15012	48" x 60'												

MAT TOP KIT INCLUDES
 1 Floor Mat, size as specified
 1 14234 Grounding Kit
 1 Sample (4oz) of Statguard Floor Mat Cleaner

Made in the
United States of America

Specifications and procedures subject to change without notice.

STATFREE® CV280 ROLLS AND MATS

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: Desco.com PHONE (909) 627-8178 DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407 PHONE (781) 821-8370	Drawing Number PM-130	DATE: November 2016
---	---------------------------------	-------------------------------

© 2015 DESCO INDUSTRIES INC.
Employer/Est. Owned